


Lift the 1-piece stand by the pole and shake to pop each leg (attached by bungee cord) into a socket. Your Summit will now stand on its own.



Carefully unroll your graphic. The top of the graphic is in the center of the roll. Attach the hardware at the top of the graphic to the top of the Summit unit mast.

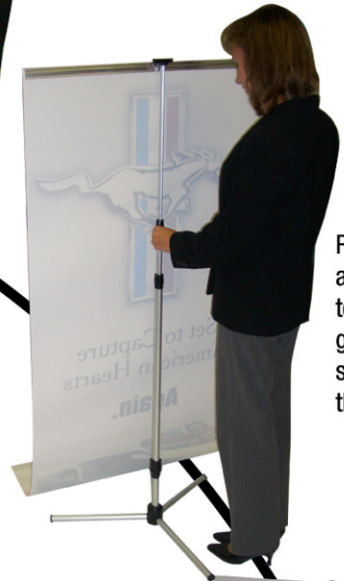

Raise the mast and graphic together until your graphic hangs straight. Tighten the twist lock.

# Summit



Hook the loop, attached to the bottom of the graphic, onto the pin on the base.



Adjust the unit mast to improve the graphic tension if necessary.





# Light information

## Summit Light Clip (B) Proper Installation




Summit Light with case available in Black or Silver finish. includes: Light, Bulb, Banner Stand Attachment Clip (attached to base of light).


*note: power supply style may vary.*

*Light can also be used without the Light Clip (B) for a near level light application.*


Check for correct fit.




Like image (LC1) Above




Not like image (LC2)

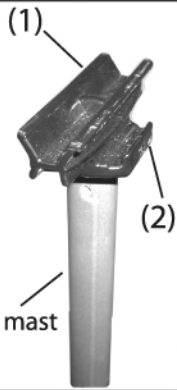

Top of Summit Banner Stand showing the hardware that accepts the light. (1) represents the area that accepts the light base (2) represents the area that accepts the graphic hardware. *this exists on both sides even though only one side is shown.*

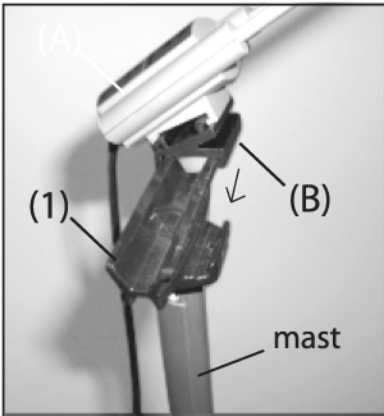

*at left*  
Slide the light base (A) with Light clip (B) over the top hardware of the Summit Banner Stand (1).

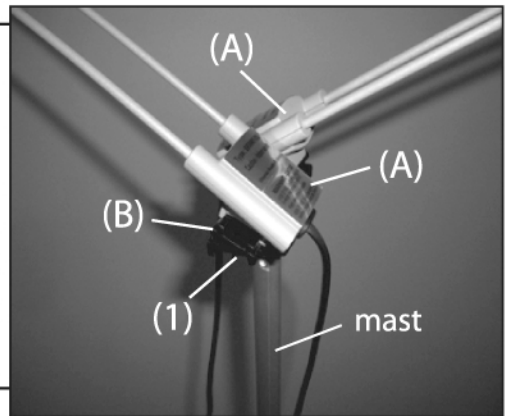


*at right*  
For a double sided application With second light facing opposite direction of first light, slide second light onto opposite side of (1).

## Two Lights Attached For A Double Sided Application



*shown without graphics applied*



*For a clean look at the top of your double sided display, Route the electrical cords neatly between the two lights.*